

BDD CELLS

STANDARD CELL TYPES


BDD Cell type	Connection* (inch)	BDD surface (cm ²)	Dimension** (H x W x D in mm)	Contact plates (material)	Cell housing (material)	Spacers (material)	Flow rate (litres/hour)
1320-2,5-10	IT 1½	13,200	1060 x 360 x 170	Ir/Ru-Ti / Pt-Ti	PP / PVDF	PP / PVDF	< 15,000
350-3-8	IT 1½	2,800	750 x 190 x 160	Ir/Ru-Ti / Pt-Ti	PP / PVDF	PP / PVDF	< 5,000
150-3-8	IT 1½	1,200	470 x 140 x 85	Ir/Ru-Ti / Pt-Ti	PP / PVDF	PP / PVDF	< 3,000
150-2-7	IT 1½	1,050	470 x 140 x 75	Ir/Ru-Ti / Pt-Ti	PP / PVDF	PP / PVDF	< 3,000
42-3-10	IT ½	420	300 x 75 x 175	Ir/Ru-Ti / Pt-Ti	PP / PVDF	PP / PVDF	< 1,000
42-2-10	IT ½	420	300 x 75 x 165	Ir/Ru-Ti / Pt-Ti	PP / PVDF	PP / PVDF	< 1,000
42-2-3	IT ½	126	300 x 75 x 120	Ir/Ru-Ti / Pt-Ti	PP / PVDF	PP / PVDF	< 1,000
18-1,5-3	HB ¾	54	137 x 72 x 33	Ir/Ru-Ti / Pt-Ti	PP / PVDF	PP / PVDF	< 150

* IT - internal thread, HB - hose barb

** H - height, W - width, D - depth

BDD CELL TYPE

150-3-8

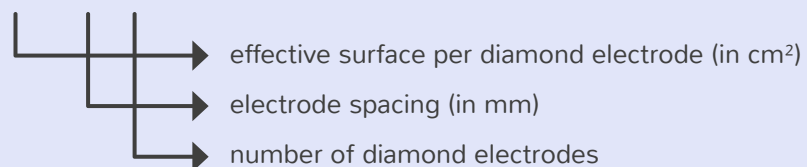

Standard cell: all components PP
 Option 1: housing PP, spacers PVDF
 Option 2: all components PVDF
 Prices: on request

