

BDD-ZELLEN

STANDARD ZELL-TYPEN


BDD-Zelle Typ	Verbindung* (Zoll)	BDD Oberfläche (cm ²)	Abmessung** (H x B x T in mm)	Kontaktplatten (Material)	Zellengehäuse (Material)	Abstandhalter (Material)	Durchfluss (Liter/Stunde)
1320-2,5-10	IG 1½	13.200	1060 x 360 x 170	Ir/Ru-Ti / Pt-Ti	PP / PVDF	PP / PVDF	< 15.000
350-3-8	IG 1½	2.800	750 x 190 x 160	Ir/Ru-Ti / Pt-Ti	PP / PVDF	PP / PVDF	< 5.000
150-3-8	IG 1½	1.200	470 x 140 x 85	Ir/Ru-Ti / Pt-Ti	PP / PVDF	PP / PVDF	< 3.000
150-2-7	IG 1½	1.050	470 x 140 x 75	Ir/Ru-Ti / Pt-Ti	PP / PVDF	PP / PVDF	< 3.000
42-3-10	IG ½	420	300 x 75 x 175	Ir/Ru-Ti / Pt-Ti	PP / PVDF	PP / PVDF	< 1.000
42-2-10	IG ½	420	300 x 75 x 165	Ir/Ru-Ti / Pt-Ti	PP / PVDF	PP / PVDF	< 1.000
42-2-3	IG ½	126	300 x 75 x 120	Ir/Ru-Ti / Pt-Ti	PP / PVDF	PP / PVDF	< 1.000
18-1,5-3	ST ¾	54	137 x 72 x 33	Ir/Ru-Ti / Pt-Ti	PP / PVDF	PP / PVDF	< 150

* IG - Innengewinde, ST - Schlauch Tülle

** H - Höhe, B - Breite, T - Tiefe

BDD-Zelle Typ

150-3-8

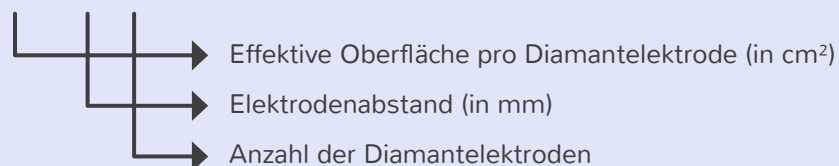

Standard-Zelle: alle Komponenten PP
 Option 1: Gehäuse PP, Abstandhalter PVDF
 Option 2: alle Komponenten PVDF
 Preise: auf Anfrage

