


# BDD-ZELLEN

## STANDARD ZELL-TYPEN

BDD-Zelle Typ	Verbindung (Zoll Innengewinde)	BDD Oberfläche (cm <sup>2</sup> )	Abmessung ca. (mm x mm x mm)	Kontaktplatten (Material)	Zellengehäuse (Material)	Abstandhalter (Material)	Durchfluss (Liter/Stunde)
<b>1320-2,5-10</b>	1.5	13.200	1060 x 360 x 170	Ir/Ru-Ti / Pt-Ti	PP / PVDF	PP / PVDF	< 15.000
<b>350-3-8</b>	1 / 1.5	2.800	750 x 190 x 160	Ir/Ru-Ti / Pt-Ti	PP / PVDF	PP / PVDF	< 5.000
<b>150-3-8</b>	0.5 / 0.75 / 1	1.200	470 x 140 x 85	Ir/Ru-Ti / Pt-Ti	PP / PVDF	PP / PVDF	< 3.000
<b>150-2-7</b>	0.5 / 0.75 / 1	1.050	470 x 140 x 75	Ir/Ru-Ti / Pt-Ti	PP / PVDF	PP / PVDF	< 3.000
<b>42-3-10</b>	0.5 / 0.75 / 1	420	300 x 75 x 175	Ir/Ru-Ti / Pt-Ti	PP / PVDF	PP / PVDF	< 1.000
<b>42-2-10</b>	0.5 / 0.75 / 1	420	300 x 75 x 165	Ir/Ru-Ti / Pt-Ti	PP / PVDF	PP / PVDF	< 1.000
<b>42-2-3</b>	0.5 / 0.75 / 1	126	300 x 75 x 120	Ir/Ru-Ti / Pt-Ti	PP / PVDF	PP / PVDF	< 1.000
<b>16-2-3</b>	0.25 / 0.375	48	190 x 55 x 35	Ir/Ru-Ti / Pt-Ti	PP / PVDF	PP / PVDF	< 150

### BDD-Zelle Typ

150-2-8

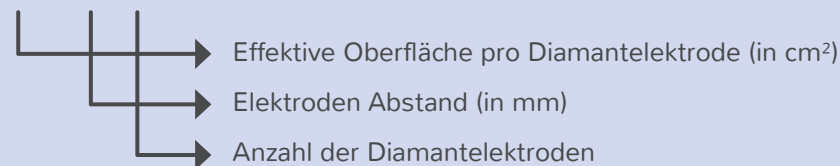

Standard-Zelle: Alle Komponenten PP  
 Option 1: Gehäuse PP, Abstandhalter PVDF  
 Option 2: Alle Komponenten PVDF  
 Preise: auf Anfrage

